




Application

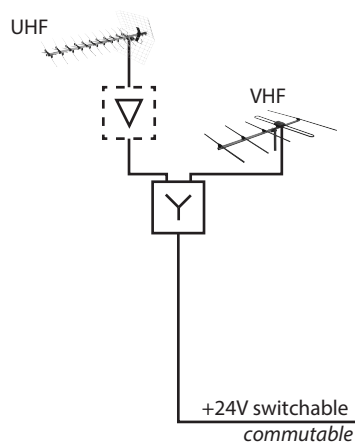

Wall or DIN rail mounting
Montage sur paroi ou rail DIN

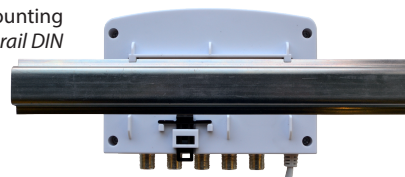

7724L2

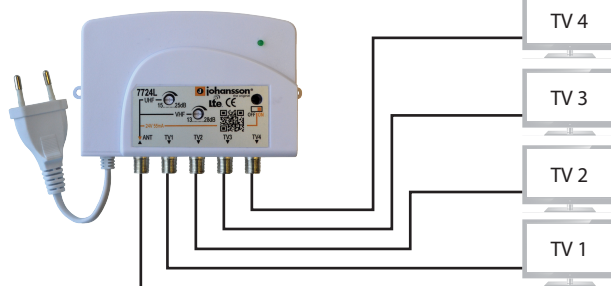

Technical specifications

- Frequencies: 40-320 + 470-694 MHz
- Adjustable gain: VHF: 13 - 28 dB
UHF: 15 - 25 dB
- Noise figure: 3.0 dB typ.
- Max. output level: 102 dBμV
- Return loss: 10 dB
- Isolation between outputs: 15 dB
- Switchable remote power: (24V / 55 mA)
- Power : 230 V~ / 6.9 VA
- Mounting : Wall or DIN rail mounting
- Dimensions : 137 x 92 x 42 mm

Caractéristiques techniques

- Fréquences: 40-320 + 470-694 MHz
- Gain réglable: VHF: 13 - 28 dB
UHF: 15 - 25 dB
- Facteur de bruit: 3.0 dB typ.
- Niveau sortie max.: 102 dBμV
- Affaiblissement de réflexion: 10 dB
- Isolation entre sorties: 15 dB
- Téléalimentation commutable: (24 V / 55 mA)
- Consommation : 230 V~ / 6.9 VA
- Montage : Montage sur paroi ou rail DIN
- Dimensions : 137 x 92 x 42 mm